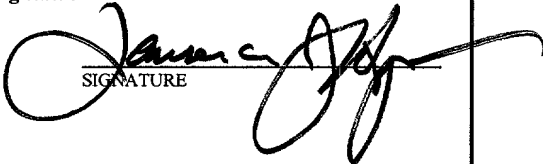


FORM PTO-1390 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 018048-0011100US
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/830976
INTERNATIONAL APPLICATION NO. PCT/US99/25653	INTERNATIONAL FILING DATE November 2, 1999	PRIORITY DATE CLAIMED November 3, 1998	
TITLE OF INVENTION METHODS FOR PREVENTING CROSS-CONTAMINATION IN SOLID SUPPORT-BASED ASSAYS			
APPLICANT(S) FOR DO/EO/US PAUL V. HAYDOCK, JASON D. RAY			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 36 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 37(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> has been communicated by the International Bureau c. <input checked="" type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)). <ol style="list-style-type: none"> a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 			
Items 11 to 20 below concern document(s) or information included:			
<ol style="list-style-type: none"> 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13^{ter}.2 and 35 U.S.C. 1.821 – 1.825. 18. <input type="checkbox"/> A second copy of the published international application under 36 U.S.C. 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input type="checkbox"/> Other items or information: 			

I/S/ Application no. (37 CFR 1.53) 09/830976 INTERNATIONAL APPLICATION NO. CT/US99/25653		ATTORNEY'S DOCKET NUMBER 018048-0011100US																										
21. <input checked="" type="checkbox"/> The following fees are submitted:		CALCULATIONS PTO USE ONLY																										
BASIC NATIONAL FEE (37 CFR 1.492(A) (1) – (5)): Neither international preliminary examination fee (37 CFR 1.492) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO\$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search report prepared by the EPO of JPO\$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)\$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)(4)\$100.00																												
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$690.00																								
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$																								
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:20%;">CLAIMS</th> <th style="width:20%;">NUMBER FILED</th> <th style="width:20%;">NUMBER EXTRA</th> <th style="width:20%;">RATE</th> <th style="width:20%;">\$</th> </tr> </thead> <tbody> <tr> <td>Total claims</td> <td>47 - 20 =</td> <td>27</td> <td>x \$18.00</td> <td>\$486</td> </tr> <tr> <td>Independent claims</td> <td>3 - 3 =</td> <td></td> <td>x \$80.00</td> <td>\$</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ 270.00</td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$1,176</td> </tr> </tbody> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	Total claims	47 - 20 =	27	x \$18.00	\$486	Independent claims	3 - 3 =		x \$80.00	\$	MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ 270.00	TOTAL OF ABOVE CALCULATIONS =				\$1,176	<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.		
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$																								
Total claims	47 - 20 =	27	x \$18.00	\$486																								
Independent claims	3 - 3 =		x \$80.00	\$																								
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ 270.00																								
TOTAL OF ABOVE CALCULATIONS =				\$1,176																								
SUBTOTAL =				\$1,176																								
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFT 1.492(f)).				\$																								
Fee for recording the enclosed assignment (37 CFR 1.2(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$																								
TOTAL FEES ENCLOSED =				\$1,176																								
				Amount to be refunded: \$																								
				charged: \$																								
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>20-1430</u> in the amount of \$ <u>1,176</u> to cover the above fees. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>20-1430</u> . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.																												
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.																												
SEND ALL CORRESPONDENCE TO: Laurence J. Hyman Townsend and Townsend and Crew LLP Two Embarcadero Center, 8th fl. San Francisco, CA 94111																												
				 SIGNATURE																								
				<u>Laurence J. Hyman</u> NAME																								
				<u>35,551</u> REGISTRATION NUMBER																								

09/05/00 76

5 METHODS FOR PREVENTING CROSS-CONTAMINATION IN SOLID SUPPORT-BASED ASSAYS

BACKGROUND OF THE INVENTION

Field of the Invention

10 This invention pertains to the field of improving the reliability and sensitivity of various assay formats in which a solid support is used. The invention provides methods of reducing cross-contamination of reagents used in, for example, nucleic acid hybridization assays and immunoassays.

Background

15 The ability to detect a specific molecule in an impure sample is a cornerstone of many modern diagnostic and research methods. For example, prior to the advent of modern techniques, diagnosis of an infectious disease often required one to isolate the pathogenic organism from a biological sample, enrich the organism, and finally identify the organism. Because many infectious diseases require quick intervention in order for a
20 successful treatment, the time and labor required for culturing and identifying the organism limited the usefulness of these methods. Moreover, these methods were useful only for samples that contain a viable pathogen. For diseases that are not caused by infectious organisms, for example, such methods were not useful.

25 More recent assays rely on detection of a molecule associated with a disease condition, rather than on detection of a pathogen itself. Often, these assays involve detecting a component of a pathogen in a biological sample. Immunoassays have long been used to detect specific molecules for which an antibody is available (*see, e.g.*, US Patent No. 5,656,448). Detection of nucleic acids associated with a pathogen provides another avenue by which the clinician can detect a pathogen or other disease-related condition (*see, e.g.*, US Patent No. 4,563,419). To facilitate detection of a molecule of interest in a crude sample, phase assays have been developed. For example, one can immobilize on a solid support

an antibody that binds to a molecule that is associated with the pathogen or disease condition. The solid support is then contacted with the sample, and the molecule of interest, if present in the sample, binds to the solid support. The sample is then removed and the molecule of interest is detected.

5 Although assays such as those described above constitute a great advance over previously available diagnostic and research assays, problems with the assays persist. For example, an assay can yield a negative result even though the sample actually contains the target analyte of interest. In other cases, one or more of the assay components can precipitate out of solution, thus rendering the assay result unreliable. Thus, a need exists for methods of obtaining more sensitive and reliable results from diagnostic and other assays. The present invention fulfills this and other needs.

SUMMARY OF THE INVENTION

10 The invention provides methods of reducing cross-contamination of reagents in various types of assays and other experiments that involve transfer of a solid support from one reagent to another. For example, in one embodiment the invention is used where an assay involves contacting a solid support with a first reagent solution, removing the solid support from contact with the first reagent solution, and contacting the solid support with a second reagent solution. To reduce cross-contamination of the second reagent solution by the
20 first reagent solution, the solid support is coated with a non-stick material prior to contacting the solid support with a first reagent solution. The solid support can be contacted with one or more intermediate reagent solutions (*e.g.*, a wash solution) prior to contacting the solid support with the second reagent solution.

25 The invention also provides methods of detecting a target analyte in a test sample by contacting the test sample with a solid support that is coated with a non-stick coating material prior to contacting the sample. Attached to the support is typically a capture reagent that binds to the target analyte. The solid support is then contacted with a signal reagent which binds to the target analyte, the presence or absence of the target analyte is determined by detecting the presence of signal reagent immobilized on the solid support.

30 In another embodiment, the invention provides an apparatus for detecting a target analyte. The apparatus includes a solid support to which is attached capture reagent

that binds to the target analyte. The solid support is coated with a non-stick coating material, which reduces or eliminates cross-contamination of reagent solutions when the solid support is moved from one reagent solution to another.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Figure 1 shows results obtained in a nucleic acid sandwich hybridization assay using uncoated prongs or prongs that had been coated with GelSlick™. The absorbance is plotted versus the amount of streptavidin used to coat the prongs after the non-stick coating was applied.

10 Figure 2A and Figure 2B show the results obtained in a nucleic acid sandwich hybridization assay in which GelSlick™-coated prongs were used. The results in Figure 2A were obtained using adjusted volumes of hybridization and assay wash solution, while those of Figure 2B were obtained using standardized assay reagent volumes of 200 µl.

DETAILED DESCRIPTION

15 Many assay formats, including immunoassays and nucleic acid hybridization assays, can suffer from artifactual results such as false negatives and interference with signal detection. The present invention is based on the discovery that these and other artifacts are often the result of reagents involved in signal generation becoming contaminated with reagents from an earlier step of the assay. For example, it was found that in an assay that uses an enzyme-linked detection agent, the introduction of agents such as detergents and chaotropic agents from a cell lysate to the solution that contains the substrate for the enzyme
20 can result in incorrect assay results. These contaminants can interfere with the assay in a number of ways. For example, the introduction of a detergent or other denaturant into the enzyme substrate solution can cause precipitation of the enzyme substrate or inactivation of the enzyme. The inventors discovered that solid supports used in the assays could carry non-specifically bound contaminants from one reagent solution to another, thus causing these
25 adverse effects. Accordingly, the invention provides methods for reducing or eliminating artifactual results that are observed in many types of assays.

Assay Formats

30 The methods of the invention are useful in assay formats that involve the use of a solid support; in particular, assays in which the solid support comes into contact with

more than one solution used in the assay. For example, in some assays a target analyte present in a test sample becomes bound, either directly or indirectly, to a solid support which is placed in the test sample. The solid support to which the target analyte is bound is then transferred sequentially to one or more other solutions that contain, for example, a detection system, a wash solution, and the like. Alternatively, the test sample is removed from the solid support and a different solution is placed in contact with the solid support. At each step, the solid support comes into contact with a different set of reagents. As described in more detail below, cross-contamination of one reagent with another can interfere with the assay.

One example of an assay format for which the methods of the invention are applicable is a sandwich assay. Sandwich assays are typically performed by placing a test sample in contact with a solid support. Immobilized on the solid support are a plurality of capture moieties to which the target analyte binds, if present in the sample. After incubation for a sufficient time to bind a substantial portion of the immobilized target analyte, the solid support is generally washed to remove unbound reagents. A detection reagent that is specific for the target analyte is then brought into contact with the target analyte, which is bound to the solid support. The solid support to which is bound the target analyte and the detection reagent is then contacted with a signal development solution that contains reagents necessary for detection of the detection reagent. The presence or absence of a detectable signal is then determined by methods appropriate for the particular label employed. For example, in the case of an enzyme used as a detectable label, a substrate for the enzyme that turns a visible color upon action of the enzyme is placed in contact with the bound detection moiety. A visible color will then be observed in proportion to the amount of the specific antigen in the sample.

An illustrative example of a sandwich assay for which the non-stick coated solid supports of the invention are useful is a nucleic acid hybridization assay. These assays typically involve attaching a capture probe, which is an oligonucleotide that is complementary to a portion of a target nucleic acid, to a solid support. The test sample is contacted with the capture probe (before, after, or simultaneously with attachment of the capture probe to the solid support) under conditions suitable for the target nucleic acid to hybridize to the capture probe. The solid support is then contacted with a signal probe, which

is generally a labeled oligonucleotide that is complementary to a portion of the target nucleic acid other than that portion to which the capture probe binds. After incubation under suitable hybridization conditions, the presence of label is then detected, typically by contacting the solid support with a signal development reagent.

5 The nucleic acids detected in these assays can be DNA, RNA, or heterohybrids. In some embodiments, the target nucleic acid is amplified prior to detection to increase the sensitivity of the assay (*see, e.g.*, US Patent No. 5,374,524). Suitable amplification methods include, for example, including the polymerase chain reaction (PCR) the ligase chain reaction (LCR), strand displacement amplification (SDA), Q β -replicase amplification, nucleic acid sequence-based amplification (NASBA), transcription mediated amplification, and the like. Examples of techniques sufficient to direct persons of skill through such *in vitro* amplification methods, are found in Sambrook *et al.* (1989) *Molecular Cloning: A Laboratory Manual, 2nd Ed., Vols. 1-3*, Cold Spring Harbor Laboratory; Berger and Kimmel (1987) *Methods in Enzymology, Vol. 152: Guide to Molecular Cloning Techniques*, San Diego: Academic Press, Inc.; and Ausubel *et al.* (1987; 1998 Suppl.) *Current Protocols in Molecular Biology*, Greene Publishing and Wiley-Interscience, New York), as well as in Mullis *et al.* (1987) U.S. Patent No. 4,683,202; *PCR Protocols A Guide to Methods and Applications* (Innis *et al.* eds) Academic Press Inc. San Diego, CA (1990) (Innis), Fahy *et al.* (1991) in *PCR Methods and Applications*, Cold Spring Harbor Laboratory Press, pp. 25-33. Reverse transcriptase PCR is described in, for example, Kawasaki (1990) in *PCR Protocols: A Guide to Methods and Applications*, M.A. Innis *et al.*, eds., pp. 21-27.

25 Another illustrative example of an assay for which the methods of the invention are useful is an immunoassay. In a solid support-based sandwich immunoassay, for example, a capture reagent is attached to a solid support. The test sample is placed in contact with the capture reagent (before, after, or simultaneously with attachment of the capture probe to the solid support) under conditions suitable for the target analyte to bind to the capture reagent. The solid support is then contacted with a labeled signal reagent that binds to the target analyte, if present on the solid support.

Causes of Assay Artifacts

A common feature of the assay formats described herein is that a solid support comes into contact with more than one solution during the course of the assay. Thus, failure to remove all reagents from the solid support before contacting the solid support with another assay solution can result in cross-contamination. Cross-contamination is particularly problematic if a reagent that is carried over can interfere with a subsequent step of the assay.

Reagents that can interfere with subsequent assay steps, if cross-contamination is not prevented, include many compounds that are used in sample preparation. For example, cell lysates that are used as the sample for immunoassays and other types of assays often contain a detergent. Detergents that are commonly used for sample preparation include non-ionic detergents such as epoxy-fatty acid esters (e.g., Tween 20 (polyoxyethylene-sorbitan monolaurate), Tween 80 (polyoxyethylene-sorbitan monooleate), Triton (alkyl-polyether-alcohol mixtures), Brij 35 (polyoxyethylene lauryl ether), Nonidet P-40 (polyoxyethylene octylphenol ether), Lubrol PX (polyethylene oxide-alkyl ether adduct), Berol EMU 043 (C16, C18 fatty alcohol with 10 oxyethylene units) and the like. Anionic detergents such as, for example, sodium dodecyl sulfate (SDS) are also used. Any of these detergents, if carried from the sample to another solution used in the assay, can cause assay failure.

Other types of denaturant that can cause adverse effects on an assay are chaotropic agents. Chaotropic agents are often used in preparation of samples for use in, for example, nucleic acid detection assays. The chaotropic agent stabilizes nucleic acids by inhibiting nuclease activity. Furthermore, the chaotropic agent allows sensitive and stringent hybridization of short oligonucleotide probes to RNA at room temperature (Van Ness and Chen (1991) *Nucl. Acids Res.* 19: 5143-5151). Suitable chaotropic agents include guanidinium chloride, guanidinium thiocyanate, sodium thiocyanate, lithium tetrachloroacetate, sodium perchlorate, rubidium tetrachloroacetate, potassium iodide, urea, and cesium trifluoroacetate, among others. Typically, the chaotropic agent will be present in a sample at a final concentration of about 1-3 M. These compounds, if bound to the solid support, can resolubilize during a later step and lead to artifactual results in the assay.

Enzyme-based detection systems, which are described in more detail below, provide an example of some types of artifactual results that can result from cross-contamination. Carryover of substances such as denaturants, detergents, and chaotropic

agents to, for example, the solution that contains the substrate for the enzyme can cause artifactual results in at least two ways. First, the contaminant can cause precipitation of the substrate, thus reducing the amount of signal generated and/or causing an increase in absorbance due to blocking of light caused by the precipitated material. Second, the contaminant can cause inactivation of the enzyme. Again, this can cause a reduction of signal from the sample.

Previously known assay formats often attempted to prevent cross-contamination by washing the solid support in between contact with the different reagents. However, the inclusion of washing steps has not eliminated artifactual results. The inventors have discovered that washing does not necessarily eliminate cross-contamination due to carryover by the solid support. Reagents present in one assay solution can precipitate onto a solid support and subsequently become resolubilized in a solution used in a later assay step. Accordingly, the present invention provides methods of reducing or eliminating this cross-contamination due to solid support carryover.

Prevention of Cross-Contamination

The invention provides methods of reducing or eliminating cross-contamination in assays due to solid support carryover. The methods involve coating the solid support with an agent that prevents non-specific binding to the support of reagents that can interfere with subsequent steps of an assay. Coating the supports with an appropriate non-stick coating agent minimizes carryover of such contaminants to a later reaction mixture.

Prior to coating with a non-stick reagent, solid supports can be pre-treated with, for example, a cleaning and/or sterilizing solution such as, for example, ethanol, methanol, propanol, and the like. The supports are generally dried prior to the coating step.

To coat the solid supports with silanes, the solid support is contacted with a solution that contains the non-stick reagent. Contacting can be accomplished, for example, by dipping, pouring, spreading, spraying, soaking, or any other method that can coat at least the portion of the solid support that will come into contact with assay reagents. The solid support is kept in contact with the non-stick reagent for a sufficient time for the support to become coated. For example, in the case of a silane or GelSlick™ the coating time is typically between about one second and about twenty minutes, more preferably between

about one minute and about ten minutes. Automated plate washers provide a particularly convenient way in which one can carry out the plating steps.

The coating material can be any compound that can prevent a potential cross-contaminant from sticking to the solid support. Several types of non-stick coatings are known to those of skill in the art. Among these are silanes such as, for example, dimethylchlorosilane, and the like. The concentration of silanizing agent in the solutions can depend on the particular solid support. For some supports, the limiting factor for maximum silane concentration is the stability of the support in the silane solution. For example, a suitable coating solution for polystyrene supports will contain between about 0.01% and about 50% silanizing agent (v/v), more preferably between about 0.1% and about 5%, in a solvent such as water or ethanol.

One example of an alternative coating agent is GelSlick™ (FMC Corporation, Chicago IL), which is a proprietary non-toxic alternative to silane-based coatings. Coating with GelSlick™ can be accomplished by contacting the solid support with undiluted GelSlick™; alternatively the coating solution can contain GelSlick™ diluted in an organic and/or aqueous solvent. In a presently preferred embodiment, the concentration of GelSlick™ in the coating solution is between about 40-60% in 40-60% ethanol. Another presently preferred coating solution contains about 2% GelSlick™ in water. Aqueous solutions of GelSlick™ are preferably emulsified by sonication, thus resulting in more efficient coating of a solid support.

As discussed below, a capture reagent that is specific for a particular target analyte is often attached to a solid support. Significantly, one can coat the solid support with the non-stick material according to the methods of the invention either before or after attaching a capture reagent to the support. The non-stick material does not interfere with the ability of capture reagents to bind to their respective target analytes. This is particularly advantageous for commercial-scale preparation of solid supports for use in assays.

The methods of the invention are particularly useful in assays that are carried out using an automated analyzer. Typically, each well in a row of a microtiter plate contains one either the sample or one of the reagents to be used in the assay. For example, a first row of wells might contain the capture reagent, the second row might contain the test samples, the signal reagent might be in the third row, a wash solution in the fourth row, and the

substrate for the enzyme linked to the signal reagent in the fifth row. The automated analyzer moves a solid support, such as a strip of polystyrene prongs or dipsticks, from one row of wells to the next. The prongs are thus placed sequentially in each of the assay reagents for an appropriate time for the particular binding or other reaction to occur. The amount of signal for each well is then determined. Suitable automated analyzers are known to those of skill in the art. Coating of the prongs with a non-stick coating according to the invention can reduce or eliminate dropouts and/or substrate precipitation caused by carryover from one well to another.

Solid Supports

The methods of the invention are useful for a wide variety of solid supports. These include, but are not limited to, dipstick-type devices, immunochromatographic test strips and radial partition immunoassay devices, and flow-through devices. The solid support can be, for example, a container in which the assay steps are performed (*e.g.*, a well of a microtiter plate, a test tube, a centrifuge tube, and the like), or can be an entity that is moved from one reaction to another (*e.g.*, a dipstick or prong). For example, in some types of assays for which the methods of the invention are applicable, a sample is placed into contact with a solid support to which a target analyte of interest binds. The sample solution is then removed from contact with the solid support, after which a second solution is placed into contact with the solid support. The solid support can be, for example, a container into which the reagent solutions are placed. Alternatively, the reagent solutions can be in different containers and the solid support moved from one container to the next. In either case, the solid support is often contacted with an intermediate solution, *e.g.*, a wash solution or a solution containing other assay components, in between contacting the first solution and the second solution.

The invention is applicable to solid supports that are made of many different materials, including, for example, glasses, plastics, polymers, metals, metalloids, ceramics, organics, and the like. Specific examples include, but are not limited to, polystyrene prongs, silicon chips, microtiter plates, glass slides, glass beads, centrifuge tubes, nitrocellulose membranes, nylon membranes, and derivatized nylon membranes, and also particles, such as magnetic particles, agarose, SEPHADEX™, and the like.

For many types of assays, such as sandwich assays and the like, it is desirable to attach to the solid support a capture reagent that can specifically bind to a target analyte of

interest. Capture reagents can be attached to the solid support either covalently or non-covalently, can be pre-immobilized on the solid support prior to contacting the sample, or can become immobilized during or after the course of the binding to the target analyte. For example, the capture reagent can include a tag that mediates binding of the capture reagent to the solid support. The tag can be any of a variety of components. In general, a molecule which binds the tag (a tag binder) is fixed to a solid support, and the tagged capture reagent is attached to the solid support by interaction of the tag and the tag binder. A number of tags and tag binders can be used, based upon known molecular interactions well described in the literature. For example, where a tag has a natural binder, for example, biotin, protein A, or protein G, it can be used in conjunction with appropriate tag binders (avidin, streptavidin, neutravidin, the Fc region of an immunoglobulin, *etc.*). Antibodies to molecules with natural binders such as biotin are also widely available and appropriate tag binders; *see*, SIGMA Immunochemicals 1998 catalogue SIGMA, St. Louis MO).

Similarly, any haptenic or antigenic compound can be used in combination with an appropriate antibody to form a tag/tag binder pair. Thousands of specific antibodies are commercially available and many additional antibodies are described in the literature. *See, Id.* Indeed, the antibody can be either the tag or the tag binder, or antibodies can be used as both tags and tag binders. For example, in one common configuration, the tag is a first antibody and the tag binder is a second antibody which recognizes the first antibody. In addition to antibody-antigen interactions, receptor-ligand interactions are also appropriate as tag and tag-binder pairs. For example, agonists and antagonists of cell membrane receptors (*e.g.*, cell receptor-ligand interactions such as *e.g.*, transferrin, c-kit, viral receptor ligands, cytokine receptors, chemokine receptors, interleukin receptors, immunoglobulin receptors and antibodies, the cadherein family, the integrin family, the selectin family, and the like; *see, e.g.*, Pigott and Power (1993) *The Adhesion Molecule FactsBook*, Academic Press New York, and Hulme (ed) *Receptor Ligand Interactions A Practical Approach*, Rickwood and Hames (series editors) Hulme (ed) IRL Press at Oxford Press NY). Similarly, toxins and venoms, viral epitopes, hormones (*e.g.*, opiates, steroids, *etc.*), intracellular receptors (*e.g.* which mediate the effects of various small ligands, including steroids, thyroid hormone, retinoids and vitamin D; peptides), drugs, lectins, sugars, nucleic acids (both linear and

cyclic polymer configurations), oligosaccharides, proteins, phospholipids and antibodies can all interact with various cell receptors.

Synthetic polymers such as heteropolymers in which a known drug is covalently bound to any of the above, such as polyurethanes, polyesters, polycarbonates, polyureas, polyamides, polyethyleneimines, polyarylene sulfides, polysiloxanes, polyimides, and polyacetates can also form an appropriate tag or tag binder. Many other tag/tag binder pairs are also useful in assay systems described herein, as would be apparent to one of skill upon review of this disclosure.

Specific tag-tag binder interactions occur when the tag and tag binder bind with a K_D of at least about 0.01 μM , preferably at least about 0.001 μM or better, and most typically and preferably, 0.0001 μM or better, under standard assay conditions.

Methods for the attachment of tags to molecules that can bind to a particular target analyte are known to those of skill in the art. For example, where the binding moiety (or "recognition moiety") is a polypeptide, a preferred embodiment of preparing a capture reagent involves producing a fusion protein by recombinant methods. For example, a polynucleotide encoding the recognition moiety is operably linked to a polynucleotide that encodes an epitope for which convenient means of detection exist. The polynucleotide encoding the epitope is preferably placed at a location relative to the recognition moiety coding sequence that does not disrupt the ability of the fusion protein to bind to the target analyte. Methods for constructing and expressing genes that encode fusion proteins are well known to those of skill in the art. Examples of techniques and instructions sufficient to direct persons of skill through these exercises are found in, for example, Sambrook, Ausubel, and Berger, all *supra*.

Examples of suitable epitopes include the *myc* and V-5 reporter genes; expression vectors useful for recombinant production of capture reagents having these epitopes are commercially available (e.g., Invitrogen (Carlsbad CA) vectors pcDNA3.1/Myc-His and pcDNA3.1/V5-His are suitable for expression in mammalian cells). Additional expression vectors for suitable fusion proteins, and corresponding detection systems are known to those of skill in the art, and several are commercially available (e.g., FLAGTM (Kodak, Rochester NY). Another example of a suitable tag is a polyhistidine sequence, which is capable of binding to metal chelate affinity ligands. Typically, six

adjacent histidines are used, although one can use more or less than six. Suitable metal chelate affinity ligands that can serve as the binding moiety for a polyhistidine tag include nitrilo-tri-acetic acid (NTA) (Hochuli, E. (1990) "Purification of recombinant proteins with metal chelating adsorbents" *In Genetic Engineering: Principles and Methods*, J.K. Setlow, Ed., Plenum Press, NY; commercially available from Qiagen (Santa Clarita, CA)).

Other haptens that are suitable for use as tags are known to those of skill in the art and are described, for example, in the *Handbook of Fluorescent Probes and Research Chemicals* (6th Ed., Molecular Probes, Inc., Eugene OR). For example, dinitrophenol (DNP), digoxigenin, barbiturates (*see, e.g.*, US Patent No. 5,414,085), and several types of fluorophores are useful as haptens, as are derivatives of these compounds. Kits are commercially available for linking haptens and other moieties to proteins and other molecules. For example, the hapten includes a thiol, a heterobifunctional linker such as SMCC can be used to attach the tag to lysine residues present on the capture reagent.

Tag binders are fixed to solid substrates using any of a variety of methods currently available. Solid substrates are commonly derivitized or functionalized by exposing all or a portion of the substrate to a chemical reagent which fixes a chemical group to the surface which is reactive with a portion of the tag binder. For example, groups that are suitable for attachment to a longer chain portion would include amines, hydroxyl, thiol, and carboxyl groups. Aminoalkylsilanes and hydroxyalkylsilanes can be used to functionalize a variety of surfaces, such as glass surfaces. The construction of such solid phase biopolymer arrays is well described in the literature. *See, e.g.*, Merrifield (1963) *J. Am. Chem. Soc.* 85: 2149-2154 (describing solid phase synthesis of, *e.g.*, peptides); Geysen *et al.* (1987) *J. Immun. Meth.* 102: 259-274 (describing synthesis of solid phase components on pins). *See*, Frank and Doring (1988) *Tetrahedron* 44: 6031-6040 (describing synthesis of various peptide sequences on cellulose disks); Fodor *et al.* (1991) *Science* 251: 767- 777; Sheldon *et al.* (1993) *Clinical Chemistry* 39(4): 718-719 and Kozal *et al.* (1996) *Nature Medicine* 2(7): 753-759 (all describing arrays of biopolymers fixed to solid substrates). Non-chemical approaches for fixing tag binders to substrates include other common methods, such as heat, cross-linking by UV radiation, and the like.

Where the capture reagent is a DNA or RNA nucleic acid, attachment to any of the various suitable solid supports is likewise performed using available techniques. For

example, one can attach to the nucleic acid a tag which has an affinity to a derivatized solid support. Suitable tags and corresponding tag binders are discussed above. In one embodiment, linkers are added to the nucleic acid and attachment to the tag is performed through the linker. Common linkers include polypeptide sequences, such as poly-gly sequences of between about 5 and 200 amino acids. In some embodiments, proline residues are incorporated into the linker to prevent the formation of significant secondary structural elements by the linker. Such flexible linkers are known to persons of skill in the art. For example, poly(ethylene glycol) linkers are available from Shearwater Polymers, Inc., Huntsville, Alabama. These linkers optionally have amide linkages, sulfhydryl linkages, or heterofunctional linkages. Solid supports which have suitable derivatives for immobilization of DNA are commercially available (*e.g.*, DNA-Bind plates, Costar).

Similarly, the tagged nucleic acid can be directly attached to a solid substrate in the assays of the invention. In this embodiment, the terminal end of the nucleic acid is, itself, the molecular tag. In this embodiment, tagged nucleic acids are fixed to or synthesized on a solid support. For example, using chip masking technologies and photoprotective chemistry it is possible to generate arrays of nucleic acid probes. These arrays, which are known, *e.g.*, as "DNA chips," can include millions of nucleic acid regions on a substrate having an area of about 1 cm² to several cm², thereby incorporating sets of from a few to millions of tagged nucleic acids. *See, e.g.*, Fodor *et al.* (1991) *Science* 251: 767- 777; Sheldon *et al.* (1993) *Clinical Chemistry* 39(4): 718-719, and Kozal *et al.* (1996) *Nature Medicine* 2(7): 753-759.

The capture reagent can become attached to the non-stick coated solid support before, after, or simultaneously with the binding of the target analyte to the capture reagent. For example, one can add the capture reagent to the sample prior to contacting the sample with the solid support. Alternatively, one can attach the capture reagent to the solid support prior to contacting the sample. In any case, once the solid support, capture reagent, and target analyte are incubated for sufficient time for the target analyte to become immobilized on the solid support, the presence or absence of the target analyte is then detected.

Signal Generation and Detection

Many methods of detecting a target analyte are known to those of skill in the art. In a sandwich assay, for example, an immobilized target analyte can be detected through

use of a signal reagent (which term includes "signal probe" as used herein). The signal reagent typically includes a recognition moiety that can specifically bind to the particular target analyte, and also a label. Recognition moieties can be prepared as described above for capture reagents.

5 The labels used in the assays of the present invention can be primary labels (where the label comprises an element that is detected directly or that produces a directly detectable element) or secondary labels (where the detected (primary) label is attached to a moiety that binds to the secondary label, *e.g.*, as is common in immunological labeling). An introduction to labels, labeling procedures and detection of labels is found in Polak and Van
10 Noorden (1997) *Introduction to Immunocytochemistry*, 2nd ed., Springer Verlag, NY and in Haugland (1996) *Handbook of Fluorescent Probes and Research Chemicals*, a combined handbook and catalogue Published by Molecular Probes, Inc., Eugene, OR. Primary and secondary labels can include undetected elements as well as detected elements. Useful
15 primary and secondary labels in the present invention can include spectral labels such as fluorescent dyes (*e.g.*, fluorescein and derivatives such as fluorescein isothiocyanate (FITC) and Oregon Green[™], rhodamine and derivatives (*e.g.*, Texas red, tetra-rhodimine isothiocyanate (TRITC), etc.), digoxigenin, biotin, phycoerythrin, AMCA, CyDyes[™], and the like), radiolabels (*e.g.*, ³H, ¹²⁵I, ³⁵S, ¹⁴C, ³²P, ³³P, etc.), enzymes (*e.g.*, horse radish peroxidase, alkaline phosphatase *etc.*), spectral colorimetric labels such as colloidal gold or
20 colored glass or plastic (*e.g.* polystyrene, polypropylene, latex, etc.) beads. The label can be coupled directly or indirectly to a signal reagent according to methods well known in the art. As indicated above, a wide variety of labels may be used, with the choice of label depending on sensitivity required, ease of conjugation with the compound, stability requirements, available instrumentation, and disposal provisions.

25 Preferred labels include those that use: 1) chemiluminescence (using horseradish peroxidase and/or alkaline phosphatase with substrates that produce photons as breakdown products as described above) with kits being available, *e.g.*, from Molecular Probes, Amersham, Boehringer-Mannheim, and Life Technologies/ Gibco BRL; 2) color
30 production (using both horseradish peroxidase and/or alkaline phosphatase with substrates that produce a colored precipitate [kits available from Life Technologies/Gibco BRL, and Boehringer-Mannheim]); 3) hemifluorescence using, *e.g.*, alkaline phosphatase and the

substrate AttoPhos (Amersham) or other substrates that produce fluorescent products, 4) fluorescence (*e.g.*, using Cy-5 [Amersham]), fluorescein, and other fluorescent tags); 5) radioactivity. Other methods for labeling and detection will be readily apparent to one skilled in the art.

5 One example of a labeling strategy that is particularly susceptible to the adverse effects that can be avoided by using the methods of the invention uses an enzyme as the label. These methods use an antibody (for a sandwich immunoassay) or a complementary oligonucleotide (for a nucleic acid sandwich hybridization assay) that is linked to an enzyme (typically by recombinant or covalent chemical bonding). The signal reagent is detected when the enzyme is placed in contact with its substrate, producing a detectable product.

Preferred enzymes that can be conjugated to signal reagents of the invention include, *e.g.*, β -galactosidase, luciferase, horse radish peroxidase, lysozyme, glycose-6-phosphate dehydrogenase, lactate dehydrogenase, urease, cholesterol oxidase, and alkaline phosphatase. A chemiluminescent substrate for luciferase is luciferin. One example of a chemiluminescent substrate for β -galactosidase is 4-methylumbelliferyl- β -D-galactoside. Embodiments of alkaline phosphatase substrates include p-nitrophenyl phosphate (pNPP); 5-bromo-4-chloro-3-indolyl phosphate/nitro blue tetrazolium (BCIP/NBT) and fast red/napthol AS-TR phosphate; and 4-methoxy-4-(3-phosphonophenyl) spiro[1,2-dioxetane-3,2'-adamantane]. Embodiments of horseradish peroxidase substrates include 2,2'-azino-bis(3-ethylbenzthiazoline-6 sulfonic acid) (ABTS), 5-aminosalicylic acid (5AS), o-dianisidine, and o-phenylenediamine (OPD); and 3,3',5,5'-tetramethylbenzidine (TMB), 3,3'-diaminobenzidine (DAB), 3-amino-9-ethylcarbazole (AEC), and 4-chloro-1-naphthol (4C1N). Other suitable substrates are known to those skilled in the art. The enzyme-substrate reaction and product detection are performed according to standard procedures known to those skilled in the art and kits for performing enzyme immunoassays are available as described above.

In general, a detector which monitors a particular probe or probe combination is used to detect the signal reagent label. Typical detectors include spectrophotometers, phototubes and photodiodes, microscopes, scintillation counters, cameras, film and the like, as well as combinations thereof. Examples of suitable detectors are widely available from a variety of commercial sources known to persons of skill. Commonly, an optical image of a substrate comprising bound labeling moieties is digitized for subsequent computer analysis.

EXAMPLES

The following examples are offered to illustrate, but not to limit the present invention.

Example 1

5 This Example demonstrates that SDS and n-lauryl sarcosine can be carried from a sample solution to a signal detection solution by a solid support, even when the support is washed prior to being placed in the signal detection solution. This carryover caused aberrant results such as substrate precipitation and dropout.

10 The materials used in this example were as follows: TMB (3,3,5,5'-tetramethylbenzidine; Research Diagnostics Inc., Flanders NJ), Assay Wash (0.1 M NaHPO₄, 0.5% Tween-20), a target nucleotide, a capture oligonucleotide that has a 21 nucleotide region that is complementary to a portion of the target nucleotide, and a signal nucleotide that has a 24 nucleotide region that is complementary to a different portion of the target nucleotide, Anti-Fluor POD (peroxidase; diluted 1:1000 (Boehringer Mannheim #1426346)), sample solution (5M GuSCN, 0.08 M Tris, 0.0167M EDTA, sample solution base (0.08M Tris, 0.0167M EDTA, pH 8 (contains no GuSCN), lysis solution (0.0908M Tris, 0.0099M EDTA, either 0.5% or 0.25% SDS, 5% n-lauroyl sarcosine, and 0.1% Proclin), signal solution base (0.05M Tris, 0.01M EDTA, 0.5% Tween-20).

15 The prongs used in the automated analyzer were coated with streptavidin as follows. First, the prongs were dipped in 95% ethanol for about 2 minutes, after which they were allowed to dry for about 10 minutes. The prongs were then incubated for 1 hour at room temperature in 150 µl of 10µg/ml streptavidin. Finally, they were washed twice with 200 µl of assay wash solution.

20 The assays were carried out in a Saigene automated analyzer, which is designed to carry a solid-phase plastic prong strip through the steps of a sandwich hybridization assay. The reagents for the assay are dispensed in a 96 well microwell plate. The processor is programmed with instructions contained on a program card (2MB8); the program instructs the processor as to the dwell time in each well. These times are outlined in Table 1. Eight rows of wells were used, with each row corresponding to one step of the analyzing steps. The analyzer was programmed to place the solid support prongs in the capture reagent (contains 200 ng/ml of the capture oligonucleotide in assay wash solution)

25

30

for ten minutes, after which the prongs were placed in the sample solution (contains the target oligonucleotide in 3M GuSCN (which was diluted in a ratio of 60:40 from a 5M solution)) for ten minutes. Next, the prongs were moved to a row of wells that contained the signal reagent (signal oligonucleotide at 300 ng/ml in signal solution; 2 M GuSCN) for five minutes. The prongs were then placed in a wash solution for 1 minute, after which they were placed in the conjugate solution (anti-fluorescein HRP conjugate) for five minutes. Two more washes followed (1 minute followed by two minutes, after which the prongs were placed in the signal development solution, which contained TMB, for eight minutes.

Table 1: Basic Plate Setup

WELL	STEP	TIME (minutes)	REAGENT
8	8	8	Substrate
7	7	2	Wash
6	6	1	Wash
5	5	5	Conjugate
4	4	1	Wash
3	3	5	Signal
2	1	10	Capture
1	2	10	Sample

Following the reaction, the substrate-containing wells were examined for the presence of precipitated materials. The experiment in which the lysis solution contained 0.25% SDS resulted in precipitation in 3 out of 12 wells. The experiment in which the lysis solution contained 0.5% SDS showed precipitation in 9 out of 12 wells. Therefore, carryover of SDS and n-lauroyl sarcosine from a sample solution to the enzyme substrate solution can cause precipitation of the substrate.

Example 2

This Example demonstrates that coating the prongs with a non-stick agent such as GelSlick™ can reduce or eliminate carryover.

The materials used in this experiment were as described in Example 1, except that the lysis solution contained 0.25% SDS instead of 0.5%.

The prongs in the control group were coated only with streptavidin, whereas in the experimental group, the prongs were coated with GelSlick™ first, then with streptavidin. For the control group, the prongs were dipped in 95% ethanol for about 2 minutes. After allowing the prongs to dry for about 10 minutes, the prongs were further incubated for 1 hour at room temperature in 100μl of 10μg/ml streptavidin. Finally, the prongs were washed twice with 200μl of assay wash solution.

For the experimental group, the prongs were dipped in 95% ethanol for about 2 minutes and allowed to dry for about 10 minutes. Meanwhile, GelSlick™ was diluted in water to 2%, and 75ml of the diluted GelSlick™ was added to a small tray, such as a lid from a pipette tip box. The prongs were placed upside down in the tray, making sure that the solution surface did not touch the ball end of the prongs. This way, the prong stems were coated with GelSlick™, but not the ball ends. (Later experiments demonstrated that the non-stick coating does not interfere with the streptavidin coating of the prong; therefore, in preferred embodiments the entire prong strip is coated with nonstick reagent after the prongs are coated with streptavidin.) The prongs were then removed and allowed to dry, after which the prongs were incubated further in 100μl of 10 μg/ml streptavidin for one hour at room temperature, and then washed twice with 200 μl assay wash.

For each of the two groups, three different amounts of streptavidin were used: 75, 100, and 150 μl of 10 μg/ml streptavidin.

A standard diagnostic assay was performed using both sets of prongs. The standard diagnostic assay was run with both the experimental group and the control group. See Table 1 for the basic plate set-up of the assay. Reagents were as described in Example 1.

Table 2: Comparison of Coated and Uncoated Prongs

coat vol:	Standard Prongs			GelSlick™-Coated Prongs		
	75 μl	100μl	150 μl	75 μl	100 μl	150 μl
1	0.662	0.672	0.631	2.719	4.111	1.946
2	3.922	4.018	>4.2	3.697	3.977	>4.2
3	3.490	3.757	1.490	3.178	3.691	>4.2
4	3.696	4.007	3.823	3.274	4.055	3.823

coat vol:	Standard Prongs			GelSlick™-Coated Prongs		
	75 μ l	100 μ l	150 μ l	75 μ l	100 μ l	150 μ l
5	3.829	3.856	>4.2	3.476	3.939	>4.2
6	2.408	4.029	3.923	3.257	3.942	>4.2
7	0.394	4.067	4.176	3.395	3.067	>4.2
8	3.941	3.748	4.980	3.588	4.010	>4.2
9	4.100	4.044	3.894	3.512	4.098	>4.2
10	1.853	3.590	0.040	3.874	>4.2	>4.2
11	0.708	0.537	3.956	4.024	>4.2	>4.2
12	3.907	0.598	0.474	4.128	4.157	>4.2
AVE	2.743	3.077	2.829	3.510	3.906	2.885
SD	1.4635	1.4996	1.7246	0.3919	0.3213	1.3272
CV	53%	49%	61%	11%	8%	46%

Average w/ off scale
values calculated at
4.2:

3.057

3.955

3.980

The shaded entries indicate drop-outs and/or samples in which precipitation occurred, and samples that for which the absorbance was off-scale are shown as >4.2.

As shown in Table 2, the overall signal strength increased as the amount of coating solution increased. Prongs coated with GelSlick™ had overall about 1 OD higher signal at each coating volume than those not coated with GelSlick™ (Figure 1). Thus, the results from the two groups indicated that coating the prong with GelSlick™ increased the sensitivity of the assay.

Example 3

In the previous Example, the prongs were coated with a non-stick material prior to attachment of the capture reagent. This Example demonstrates that one can coat the prongs with a non-stick material after they have been coated with a capture reagent, in this case, streptavidin.

Materials used in this experiment were as described in Example 1, except that the lysis solution contained 0.25% SDS, and the signal reagent was biotin-HRP at a concentration of 12.5 ng/ml.

The prongs were prepared as follows. First, the prongs were dipped in 95% ethanol for about 2 minutes and allowed to dry for about 10 minutes. Next, they were incubated in 100 μ l of 10 μ g/ml streptavidin at room temperature for 1 hour. Then, prongs were washed twice with 200 μ l of the assay wash solution. The prongs were then coated with

GelSlick™ by dipping them in a 2% GelSlick™ (in water, sonicated to an emulsion) for about 2 minutes, and allowed to dry.

Two groups of experiments were run. As a control, a “mock” assay was run without the capture, signal and linker reagents. The second group was the experimental group which included each of these reagents. Both groups were run in duplicate using different hybridization and wash volumes. In one set of assays, 200µl of each assay reagent were placed in the wells. In another set, either the volume of the hybridization solution (150µl) used in the sample and signal wells (samples 1 and 3), or the volume of the assay wash solution (250µl; samples 4, 5 and 7) were varied. The basic plate setup is shown in Table 3.

Table 3: Basic Plate Setup

WELL	STEP	TIME (minutes)	REAGENT
8	8	8	Substrate
7	7	1	Wash
6	6	5	Conjugate
5	5	1	Wash
4	4	1	Wash
3	3	5	Signal
2	1	10	Capture
1	2	10	Sample

The results from the experiment are shown in Table 4 and in Figures 2A and 2B. Reproducible results were obtained using this procedure, as only two dropouts occurred in the experiment, one in each of the repetition with adjusted volumes. Therefore, subsequent coating of the prongs with the non-stick material did not interfere with the ability of the streptavidin to bind to the biotin.

Table 4

	Run #1		Run #2	
	STD-200	150/250	STD-200	150/250
1	1.901	1.329	1.732	1.369
2	2.050	1.949	1.956	1.119
3	1.824	2.027	1.591	0.866
4	1.850	2.045	1.720	1.188
5	1.792	2.046	1.537	1.485
6	1.370	2.090	1.653	1.213
7	2.032	1.864	1.542	1.559
8	2.013	2.024	1.690	1.638
9	1.997	2.080	1.691	1.591
10	1.643	1.915	1.787	1.696
11	1.978	1.964	1.952	1.524
12	1.656	0.687	1.656	1.925
AVE	1.842	1.835	1.725	1.431
SD	0.2033	0.4153	0.1410	0.2920
CV	11%	23%	8%	20%

Example 4

This Example evaluates the effect of coating the prongs with 0.1% silane vs. 2% GelSlick™ on the reduction of substrate precipitation. In this Example, prongs were coated with streptavidin before they were coated with either silane or GelSlick™.

Materials used in this experiment were as described in Example 3, except that the Sample solution, Sample solution base, Signal solution and signal solution base contained no formamide.

Two groups of experiments were performed: in the Silane group, prongs were coated with diluted silane, and in the GelSlick™ group, the prongs were coated with GelSlick™.

The prongs were coated as follows. First, the prong reservoir was filled with 27 total ml of ethanol: 2 ml into a separate well for each prong, and the remaining 25 ml into a common reservoir. Then the filled prong-cassette was inserted into the reservoir and

allowed to soak for 2 minutes. The prong-cassette was removed and placed in a dry, empty reservoir and the prongs were allowed to fully dry for about 20 minutes. Wells of a Falcon flexible assay plate (#912) were filled with 100 μ l of streptavidin at 10 μ g/ml (diluted in coating buffer). The prongs were coated by snapping the filled prong-cassette into the assay plate containing the streptavidin and incubating for one hour at room temperature. The prong-cassette was removed, and the prongs were washed twice by emptying the wells of the coating solution, filling the wells with 200 μ l of assay wash, and then inserting the prongs. The prongs were then removed, and wells of used wash were emptied. The wash was repeated once. The prongs were then allowed to air dry for 15 minutes.

While the prongs were drying, the secondary coating solution was made up. For the GelSlick™ group, GelSlick™ was diluted to 2% with water (4ml GelSlick™ + 196ml water). For the silane group, silane was diluted to 0.1% with water. The solution was vortexed to begin mixing. After vortexing, the solution was set in a sonicator for 10 minutes (power set at 50%, degas set at 100%).

Sonicated GelSlick™ solution was added to prongs in a small tray. Mixing was performed on an orbital shaker for 5 minutes, ensuring that the fluid level is above the ball of the prongs. The prongs were then dried in a desiccator for 30 minutes. Vacuum was set by pulling full draw on the container for 1.5 minutes.

The basic plate setup for this assay is shown in Table 5.

Table 5: Basic Plate Setup

WELL	STEP	TIME (minutes)	REAGENT
8	8	8	Substrate
7	7	1	Wash
6	6	5	Conjugate
5	5	1	Wash
4	4	1	Wash
3	3	5	Signal

WELL	STEP	TIME (minutes)	REAGENT
2	1	10	Capture
1	2	10	Sample

The results of this experiment, which are shown in Table 6, demonstrate that 0.1% silane and 2% GelSlick™ were similarly effective in reducing substrate precipitation.

Table 6

	0.1% Silane	2% GelSlick™
1	2.023	1.848
2	2.124	1.369
3	2.020	1.880
4	2.038	1.481
5	1.978	1.652
6	1.696	1.821
7	1.946	1.737
8	1.721	1.847
9	1.726	2.015
10	2.007	1.881
11	2.017	2.119
12	0.253	2.144
AVE	1.796	1.816
SD	0.5062	0.2325
CV	28%	13%
	1.936	
	0.1489	
	8%	

Example 5

This Example provides a protocol for coating a solid support with a non-stick coating.

The materials used in this experiment were as described in Example 4. The test solution was prepared by mixing Sample solution and Lysis solution in a ratio of 60:40, together with 5 µg/ml polyadenylic acid. 5MB9 program card was used in the analyzer, as were prongs obtained from Becton and Dickinson (Sparks, MD).

A. Prong preparation

The prong reservoir was filled with 27 ml 95% ethanol: 2 ml into the separate well and the remaining 25ml into the common reservoir. The filled prong-cassette was inserted into the reservoir and allowed to soak for 2 minutes, after which the prong-cassette was removed and placed in a dry, empty reservoir. The prongs were allowed to fully dry for about 20 minutes.

Wells of a Falcon flexible assay plate (#912) were filled with 100 μ l of streptavidin at 10 μ g/ml (diluted in coating buffer). Prongs were coated by snapping the filled prong-cassette into the assay plate containing the streptavidin and incubating for one hour at room temperature. The prong-cassette was then removed, and the prongs were washed twice by emptying the wells of coating solution, filling them with 200 μ l of assay wash, and then inserting the prongs. Again, the prongs were removed and wells of used wash were emptied. This procedure was repeated once. The prongs were then air-dried for 15 minutes.

While the prongs were drying, a secondary coating solution was made up by diluting GelSlick™ to 2% with water (4 ml GelSlick™ + 196 ml water). The coating solution was mixed by vortexing, after which the solution was set in a sonicator for 10 minutes (power set at 50%; degas set at 50%). The sonicated GelSlick™ solution was added to the prongs in a small tray, and then mixed on an orbital shaker for five minutes.

The filled prong-cassette was then submerged in 75% ethanol for about one minute. Then the prongs were removed and excess ethanol was shaken off of the prong surface. Afterwards, the prongs were dried in a desiccator for 30 minutes. Vacuum was set by pulling full draw on the container for 1.5 minutes.

B. Assay

The assay was performed with Signal solution at 1 M and sample solution at 2M (diluted 60:40 from a 3.33M solution). This run included 5 μ g/ml of polyadenylic acid in the sample solution. To facilitate the comparison of this run to previous experiments, two strips of prongs were run in which the sample solution did not contain any polyadenylic acid. As a further control, a standard "mock" assay was run without capture, signal or linker reagents.

The Basic plate set-up is similar to those in the previous examples (Table 7).

Table 7: Basic Plate Setup

WELL	STEP	TIME (minutes)	REAGENT
8	8	8	Substrate
7	7	2	Wash
6	6	5	Conjugate
5	5	2	Wash
4	4	2	Wash
3	3	5	Signal
2	1	10	Capture
1	2	10	Sample

The results of this experiment are shown in Table 8. The data shown in “Control #1” and “Control #2” columns, in which the samples lacked polyA, demonstrate that this protocol provided results that compare well with those of earlier experiments that did not contain polyA. The average absorbance obtained with polyA-containing samples was slightly lower than that obtained with no polyA, and the standard deviation was slightly higher. However, this slight increase in variability is almost entirely due to a “trough effect” that occurred in Runs #2 and #3 (underlined values).

Table 8

2' Coated Prongs (020597 ptcl) Vinyl Plate								
	Control #1	Control #2	#1	#2	#3	#4	#5	#6
1	2.118	2.247	2.211	2.038	2.199	2.305	2.077	1.935
2	2.106	2.057	2.219	1.995	2.097	2.117	2.214	2.108
3	2.181	2.145	2.066	1.984	2.000	2.001	2.023	2.039
4	2.139	2.003	1.958	1.744	1.949	2.012	2.080	2.054
5	1.990	2.134	2.018	<u>1.788</u>	1.828	1.930	1.980	2.074
6	2.159	2.067	2.035	<u>1.551</u>	<u>1.741</u>	1.875	1.950	2.166
7	2.125	1.974	2.033	<u>1.539</u>	<u>1.642</u>	1.917	1.979	1.918
8	2.174	2.072	1.915	<u>1.635</u>	<u>1.684</u>	1.937	2.032	2.002
9	2.122	2.001	1.943	<u>1.496</u>	<u>1.732</u>	1.989	2.002	2.124
10	2.270	1.917	2.028	<u>1.690</u>	1.890	2.096	1.970	2.102
11	2.133	1.923	2.029	1.990	2.011	2.205	1.967	2.035
12	2.025	2.147	2.096	2.179	2.265	2.363	2.073	1.875
AVE	2.129	2.057	2.046	1.802	1.920	2.062	2.029	2.036
SD	0.0717	0.0995	0.0940	0.2283	0.2030	0.1580	0.0740	0.0890
CV	3%	5%	5%	13%	11%	8%	4%	4%
tAV	2.093		1.983					
E	0.0922		0.1747					
tSD	4%		9%					
tCV								

Example 6

This example illustrates the use of a solid support coated with a silanizing agent in reducing detergent-caused substrate precipitation and enzyme inactivation in immunoassays. Immunoassays are often performed using as samples cell lysates or other relatively impure mixtures that contain a target molecule of interest. These mixtures can contain detergents and other agents that can interfere with the immunoassay. The use of a

silanizing agent to coat prongs as described in this Example can prevent such contaminants from having an adverse effect on the assay.

The prongs are coated with a silanizing agent such as Gel Slick™ as described in the previous Examples. The coated prongs are then coated with protein A, which can bind IgG immunoglobulins.

To perform the immunoassay, the prongs are first placed into a solution that contains an IgG immunoglobulin that is specific for the target molecule. This "capture reagent" is bound by the IgG constant region, leaving the variable regions of the immunoglobulin available to bind the target molecule.

The prongs are then placed in wells that contain a sample, such as a cell lysate. After incubation in the sample for a sufficient time for the target molecules, if present, to bind to the protein A, the prongs are moved to wells that contain a signal reagent such as an antibody that can bind to the target molecule. The antibody is labeled with, for example, an enzyme. The prongs are then washed to remove any unbound materials, including detergents or other agents present in the sample that could interfere with the immunoassay. After washing, the prongs are placed into a substrate solution that includes reagents (*e.g.*, substrates for the enzyme) that exhibit a detectable change when the signal reagent is present.

It is understood that the examples and embodiments described herein are for illustrative purposes only and that various modifications or changes in light thereof will be suggested to persons skilled in the art and are to be included within the spirit and purview of this application and scope of the appended claims. All publications, patents, and patent applications cited herein are hereby incorporated by reference for all purposes.

WHAT IS CLAIMED IS:

- 1 1. A method of reducing cross-contamination of an assay reagent solution,
2 the method comprising:
3 contacting a solid support with a first reagent solution
4 removing the solid support from contact with the first reagent solution;
5 and
6 contacting the solid support with a second reagent solution;
7 wherein cross-contamination of the second reagent solution by the first
8 reagent solution is reduced by coating the solid support with a non-stick material prior to
9 contacting the solid support with a first reagent solution.
- 1 2. The method of claim 1, wherein the solid support is contacted with one
2 or more intermediate reagent solutions prior to contacting the solid support with the second
3 reagent solution.
- 1 3. The method of claim 2, wherein the intermediate solution comprises a
2 wash solution.
- 1 4. The method of claim 1, wherein the solid support is removed from a
2 first container that contains the first reagent solution and placed in a second container that
3 contains the second reagent solution.
- 1 5. The method of claim 4, wherein the first container and the second
2 container are wells of a microtiter plate.
- 1 6. The method of claim 4, wherein the solid support is selected from the
2 group consisting of a prong, a dipstick, a glass bead, and a magnetic particle.
- 1 7. The method of claim 1, wherein the solid support comprises a container
2 and the first reagent solution is removed from the container and the second reagent solution
3 is placed into the container.

1 8. The method of claim 7, wherein one or more intermediate solutions is
2 placed into the container after removing the first reagent solution and prior to placing the
3 second reagent into the container.

1 9. The method of claim 7, wherein the solid support is selected from the
2 group consisting of: a microtiter plate, a tube, a silicon chip, and a slide.

1 10. The method of claim 1, wherein the solid support comprises a capture
2 reagent which specifically binds to a target analyte.

1 11. The method of claim 1, wherein the first reagent solution comprises a
2 denaturant.

1 12. The method of claim 11, wherein the denaturant is selected from the
2 group consisting of a chaotropic agent and a detergent.

1 13. The method of claim 1, wherein the non-stick coating material is
2 selected from the group consisting of silane, dimethylchlorosilane and Gel Slick™.

1 14. The method of claim 1, wherein the second reagent solution comprises a
2 substrate which produces a detectable product when contacted with an enzyme linked to a
3 signal reagent.

1 15. A method of detecting a target analyte in a test sample, the method
2 comprising:
3 contacting a test sample with a solid support which comprises a capture
4 reagent that binds to the target analyte, wherein the solid support is coated with a non-stick
5 coating material prior to contacting the sample;
6 contacting the solid support with a signal reagent which binds to the
7 target analyte; and
8 determining whether the test sample contains the target analyte by
9 detecting the presence of signal reagent immobilized on the solid support.

1 16. The method of claim 15, wherein the non-stick coating material is a
2 silanizing agent.

1 17. The method of claim 15, wherein the non-stick coating material is
2 selected from the group consisting of silane, dimethylchlorosilane and Gel Slick™.

1 18. The method of claim 15, wherein the test sample comprises a
2 denaturant.

1 19. The method of claim 18, wherein the denaturant is selected from the
2 group consisting of a chaotropic agent and a detergent.

1 20. The method of claim 15, wherein the solid support is coated with the
2 non-stick coating material after the capture reagent is attached to the solid support.

1 21. The method of claim 15, wherein the capture reagent is attached to the
2 solid support prior to contacting the test sample with the solid support.

1 22. The method of claim 15, wherein the capture reagent is attached to the
2 solid support simultaneously with contacting the test sample with the solid support.

1 23. The method of claim 15, wherein the method further comprises washing
2 the solid support prior to contacting the solid support with the signal reagent.

1 24. The method of claim 15, wherein the method further comprises washing
2 the solid support prior to detecting the presence of signal reagent.

1 25. The method of claim 15, wherein the solid support is selected from the
2 group consisting of a dipstick, a bead, a magnetic particle, a centrifuge tube, and a glass
3 slide.

1 26. The method of claim 15, wherein the capture reagent is covalently
2 attached to the solid support.

1 27. The method of claim 15, wherein the capture reagent is noncovalently
2 attached to the solid support.

1 28. The method of claim 27, wherein the capture reagent comprises a tag
2 which binds to a tag binder attached to the solid support.

1 29. The method of claim 28, wherein the tag is biotin and the tag binder is
2 selected from the group consisting of avidin, streptavidin, and an antibody that binds to
3 biotin.

1 30. The method of claim 28, wherein the capture reagent comprises an
2 antibody and the tag binder is selected from protein A, protein G, and an antibody that binds
3 to the capture reagent.

1 31. The method of claim 15, wherein the target analyte comprises a
2 polynucleotide and the capture reagent comprises an oligonucleotide which hybridizes to the
3 polynucleotide.

1 32. The method of claim 31, wherein the polynucleotide is DNA or RNA.

1 33. The method of claim 31, wherein the signal reagent comprises a
2 detectable label attached to an oligonucleotide which hybridizes to the polynucleotide.

1 34. The method of claim 31, wherein the signal reagent comprises a
2 detectable label attached to an antibody which specifically binds to double stranded nucleic
3 acids.

1 35. The method of claim 31, wherein the polynucleotide is amplified prior
2 to contacting the sample with the capture reagent.

1 36. The method of claim 35, wherein the polynucleotide is amplified by a
2 procedure selected from the group consisting of polymerase chain reaction, ligase chain
3 reaction, strand displacement amplification, transcription mediated amplification, and
4 NASBA.

1 37. The method of claim 31, wherein the denaturant is selected from the
2 group consisting of guanidine, sodium thiocyanate, urea, and lithium TCA.

1 38. The method of claim 15, wherein the capture reagent comprises an
2 antibody which binds to the target analyte.

1 39. The method of claim 15, wherein the signal reagent comprises an
2 antibody which binds to the target analyte.

1 40. The method of claim 15, wherein the signal reagent comprises a
2 detectable label.

1 41. An apparatus for detecting a target analyte, the apparatus comprising a
2 solid support attached to a capture reagent which binds to the target analyte, wherein the
3 solid support is coated with a non-stick coating material.

1 42. The apparatus of claim 41, wherein the non-stick coating material is a
2 silanizing agent.

1 43. The apparatus of claim 42, wherein the silanizing agent is selected from
2 the group consisting of silane, dimethylchlorosilane and Gel Slick™.

1 44. The apparatus of claim 41, wherein the solid support is selected from
2 the group consisting of a prong, a dipstick, a glass bead, and a magnetic particle.


1 45. The apparatus of claim 41, wherein the capture reagent is noncovalently
2 attached to the solid support.

1 46. The apparatus of claim 41, wherein the capture reagent comprises an
2 oligonucleotide which hybridizes to a polynucleotide which comprises the target analyte.

1 47. The apparatus of claim 41, wherein the capture reagent comprises an
2 antibody which binds to the target analyte.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202

Figure 1

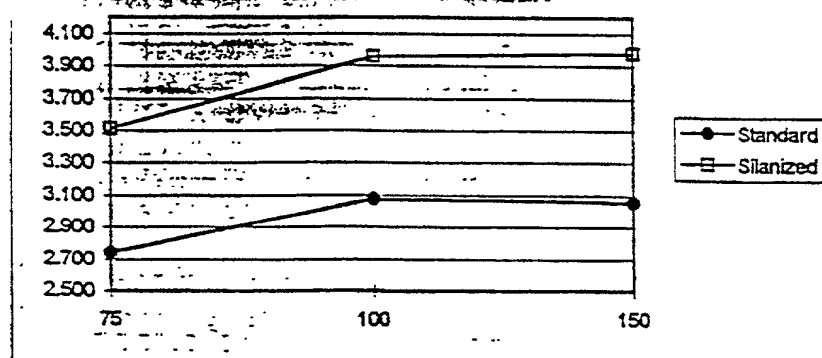

09/03/97

Figure 2A



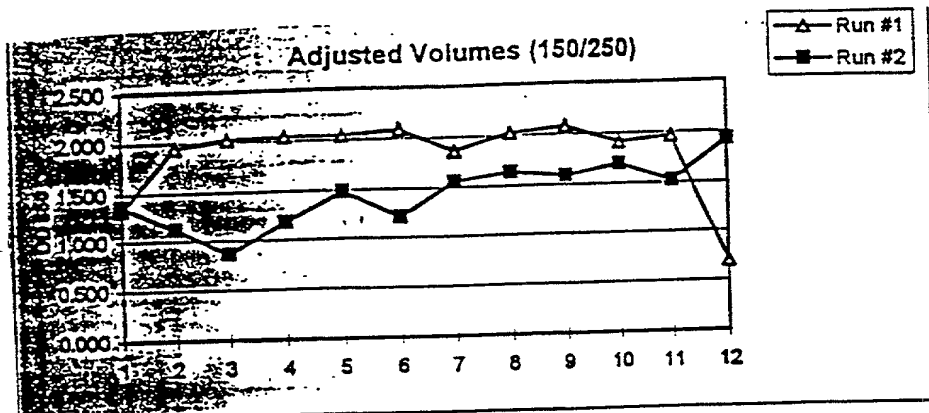


Figure 2B

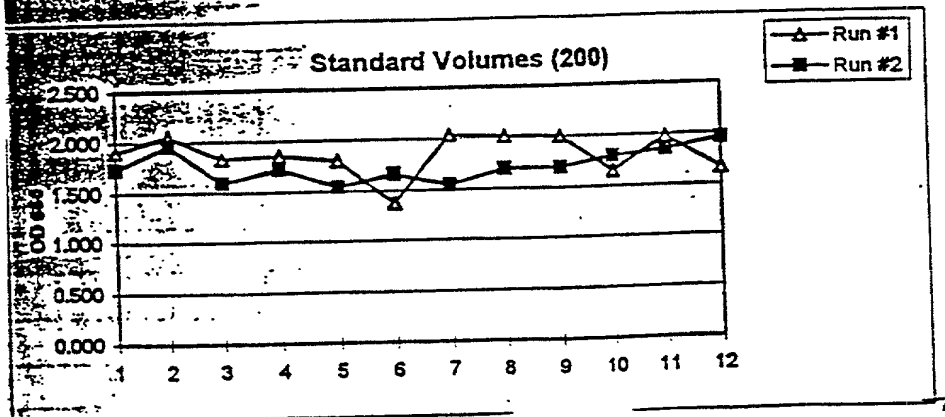

Please type a plus sign (+) inside this box



PTO/SB/01 (10-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☐ Declaration
Submitted With Initial
Filing

OR

☒ Declaration
Submitted after Initial
Filing (surcharge
(37 CFR 1.16 (e))
required)

Attorney Docket Number 018048-001110US

First Named Inventor Haydock, Paul V.

COMPLETE IF KNOWN

Application Number 09/830,976

Filing Date

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHODS FOR PREVENTING CROSS-CONTAMINATION IN SOLID SUPPORT-
BASED ASSAYS**

the specification of which (Title of the Invention)

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY) **11/02/1999** as United States Application Number or PCT International

Application Number **PCT/US99/25653** and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY) Country	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
60/106,857	November 3, 1998	

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:** Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

POWER OF ATTORNEY OR AUTHORIZATION OF AGENT	Application Number	09/830,976
	Filing Date	
	First Named Inventor	Haydock, Paul V.
	Title	METHODS FOR PREVENTING CROSS-CONTAMINATION IN SOLID SUPPORT-BASED ASSAYS
	Group Art Unit	
	Examiner Name	
	Attorney Docket Number	018048-001110US

I hereby appoint:

☒ Practitioners at Customer Number

20350

Place Customer
Number Bar Code
Label here

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☒ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number

☐ Firm or
Individual Name

Address

Address

City

State

ZIP

Country

Telephone

Fax

I am the:

☐ Applicant/Inventor.

☒ Assignee of record of the entire interest. See 37 CFR 3.71. (Saigene Corporation)

Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).

SIGNATURE of Applicant or Assignee of Record

Name

Signature

Date

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below*.

☐ *Total of _____ forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any Comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

SF 1256087 v1

Please type a plus sign (+) inside this box →



PTO/SB/01 (10-00)

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to:		<input checked="" type="checkbox"/> Customer Number or Bar Code Label	20350		OR	<input type="checkbox"/> Correspondence address below
Name						
Address						
Address						
City				State	ZIP	
Country			Telephone		Fax	
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p>						
NAME OF SOLE OR FIRST INVENTOR:				<input type="checkbox"/> A petition has been filed for this unsigned inventor		
Given Name <u>Paul V.</u>				Family Name <u>Haydock</u> or Surname		
Inventor's Signature <u>Paul V. Haydock</u>				Date <u>8/13/01</u>		
Residence: City <u>Shoreline</u>		State <u>Washington</u>	Country <u>USA</u>		Citizenship <u>US</u>	
Mailing Address <u>19917 19th Avenue N.E. #A</u>						
Mailing Address						
City <u>Shoreline</u>		State <u>Washington</u>	ZIP <u>98155</u>	Country <u>US</u>		
NAME OF SECOND INVENTOR:				<input type="checkbox"/> A petition has been filed for this unsigned inventor		
Given Name <u>Jason B.</u>				Family Name <u>Ray</u> or Surname		
Inventor's Signature <u>Jason B. Ray</u>				Date <u>8/10/01</u>		
Residence: City <u>Seattle</u>		State <u>Washington</u>	Country <u>USA</u>		Citizenship <u>US</u>	
Mailing Address <u>11541 Greenwood Avenue N. #B-1</u>						
Mailing Address						
City <u>Seattle</u>		State <u>Washington</u>	ZIP <u>98133</u>	Country <u>US</u>		
<input type="checkbox"/> Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.						